


ComAnt[®] Communications Antennas

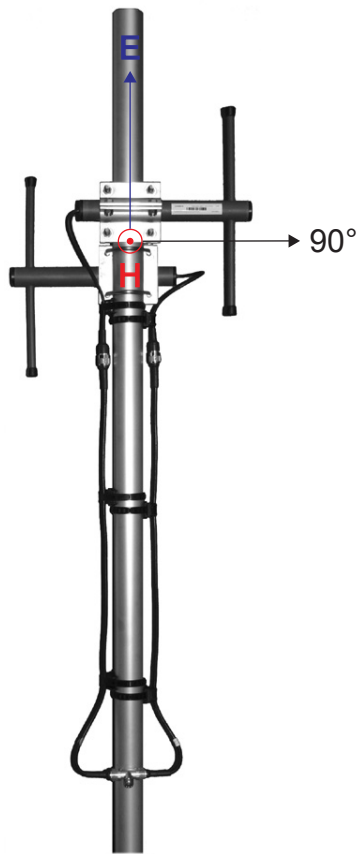

FREQUENCY INDEPENDENT DATA


Description: bidirectional broadside
 Frequency: 135-145 MHz, 144-156 MHz,
 154-166 MHz, 163-177 MHz,
 221-239 MHz, 326-353 MHz,
 336-364 MHz, 365-395 MHz,
 380-410 MHz, 405-440 MHz,
 440-475 MHz, 830-890 MHz,
 880-960 MHz

Impedance: 50 ohm
 Gain: 6 dBi
 H -3 dB: 71°
 E -3 dB: 69°
 F/B: 0 dB
 Polarization: vertical
 Connector: N-female/TNC-female
 VSWR: < 1.5
 Radome: UV resistant ABS/FG,
 RAL 7012, PU foam filling
 Radiator: copper
 Attachment: Ø35-60 mm, aluminium alloy
 bracket, stainless steel V-
 bolts and self locking nuts

Lightning protection: DC-short circuited
 Temperature: -40° - +80°C
 IP: 67



RADIATION PATTERN

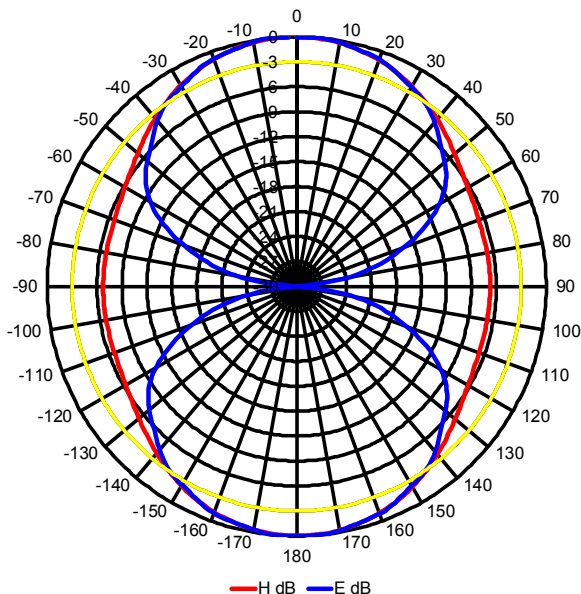

CAB2 BIDIRECTIONAL BROADSIDE